


4 VALVE STEP FILLER





FEATURES

- No electric supply needed. (Except for tank agitator or electric supply pump if needed)
- Pneumatically controlled.
- Adjustable filling bowl height for different bottle sizes.
- Stand-Alone or Fitted with conveyor to convey filled bottles.
- Filling bowl has radii for hygienic purposes.
- Product level control in tank.
- Stainless steel welded base.
- NW50 product inlet.
- Minimum of one operator required.
- Pneumatic service unit is fitted with auto draining water trap.
- No change parts for changes in bottle sizes.
- Can be upgraded to 8 Valve Step Filler

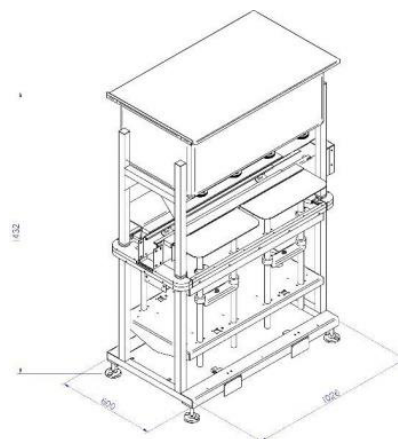

TECHNICAL INFORMATION			
Air Consumption		50L/Min @ 6 bar	
Crated Size		650 x 1 300 x 1 750mm	
Crated Mass		120 Kg	
APPROXIMATE FILLING SPEED – FOR 19 DIAMETER FILLING VALVES (bph)			
250 ml @ 1 225	350 ml @ 1 225	500 ml @ 1 120	1 lt @ 980
APPROXIMATE FILLING SPEED – FOR 28 DIAMETER FILLING VALVES(bph)			
250 ml @ 1 500	350 ml @ 1 500	500 ml @ 1 500	1 lt @ 1 250
2 lt @ 1 102	3 lt @ 700	4 lt @ 500	5 lt @ 425
Please note that filling speeds may vary as they are subject to bottle design, product viscosity, foaming characteristics and operator dependant.			
PRODUCTS			
Milk, Drinking Yogurt, Juice, Soft Drinks, Still Water, Cooking Oil, Olive Oil, Other Edible Oils, Wine, Spirits, Cosmetics Liquid, Pharmaceutical Liquid, Car Oils, Fluids, Household Chemicals			

Marefa Technologies (Pty) Ltd

Unit 17, Hugenot Park, Corner of Klein Drakenstein Road & Van Der Merwe Street, Paarl, South Africa

Tel: +27(0)21 180 4161 Email: admin@marefa.co.za

www.marefa.co.za

